




Beam position monitors, fixed to the vacuum chambers for the storage ring, were calibrated by inserting an RF probe in the vacuum chambers.

Magnets of the storage ring were separated after the alignment, vacuum chambers were installed, and the magnets were recovered.

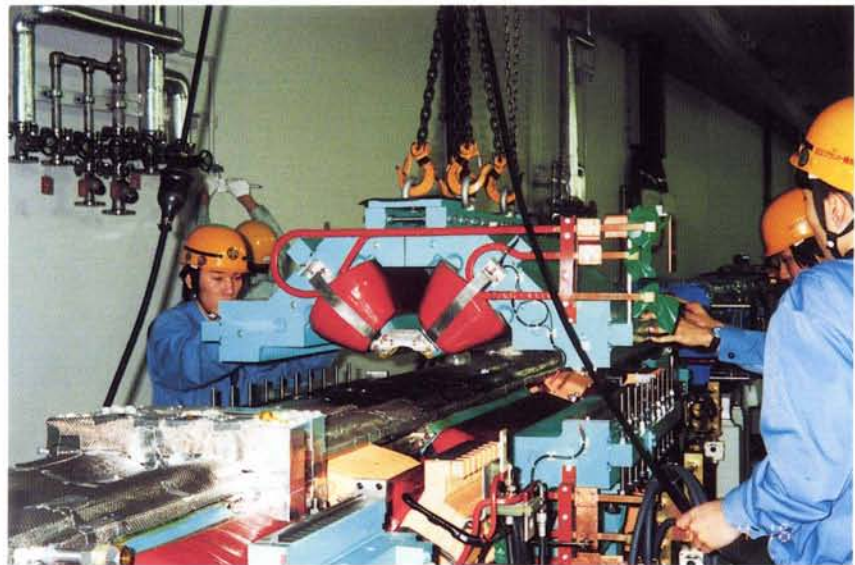

Vacuum chambers installed in the storage ring were baked and pumped using a movable baking and pumping system.